ARCHITECTURAL INSTALLATION SYSTEMS

Installed over **code-approved** wall assemblies using polymer-modified Type S mortar

EliteAzure

1850-738-9050
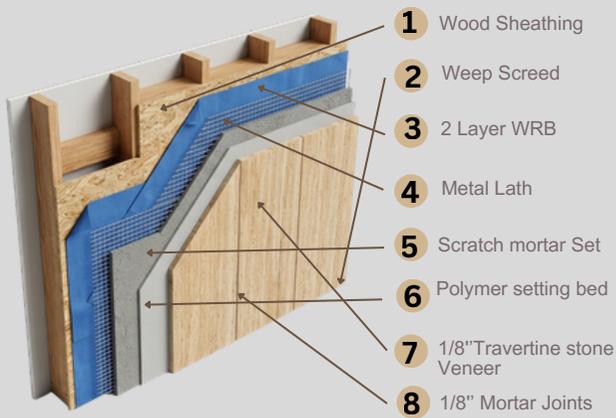info@eliteazure.com
www.eliteazure.com

Dimensions: 47" x 94"   I   1/8" thickness   I   26 LB per panel

Orientation : Vertical or Horizontally

System Classification : Non- Structural Decorative finish material
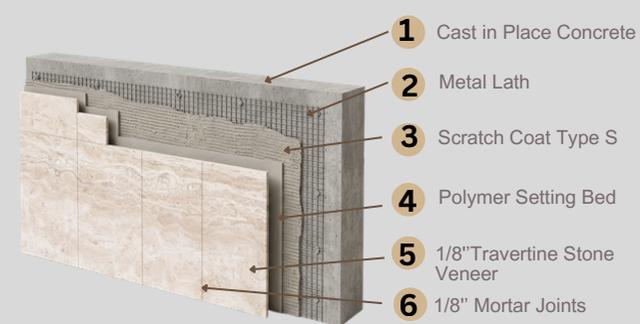
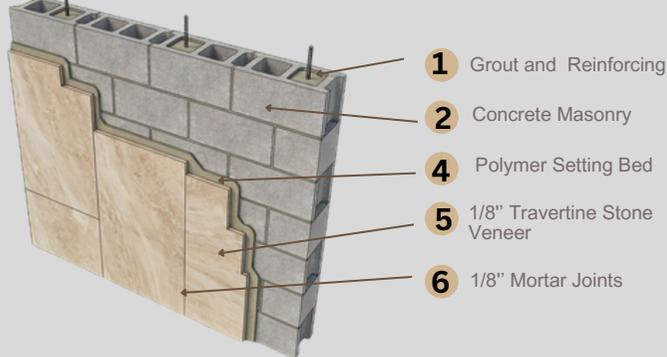**Fire Rated** : Class A Fire Rated

STONE VENEER ON WOOD FRAMING

1. Wood Sheathing
2. Weep Screed
3. 2 Layer WRB
4. Metal Lath
5. Scratch mortar Set
6. Polymer setting bed
7. 1/8" Travertine stone Veneer
8. 1/8" Mortar Joints

METAL STUD WALL TYPE E-SYSTEM

1. Wood Sheathing
2. Weep Screed
3. 2 Layer WRB
4. Metal Lath
5. Scratch mortar Set
6. Polymer setting bed
7. 1/8" Travertine stone Veneer
8. 1/8" Mortar Joints

CAST-IN-PLACE CONCRETE WALL

1. Cast in Place Concrete
2. Metal Lath
3. Scratch Coat Type S
4. Polymer Setting Bed
5. 1/8" Travertine Stone Veneer
6. 1/8" Mortar Joints

STONE VENEER ON CEMENT BOARD

1. Acceptable Sheathing
2. #15 Felt (Double Layered)
3. Exterior Cement board
4. 4" Alkali-Resistant Barrier
5. Liquid WRB
6. Polymer Setting Bed
7. 1/8" Travertine stone Veneer
8. 1/8" Mortar Joints

CONCRETE MASONRY

1. Grout and Reinforcing
2. Concrete Masonry
4. Polymer Setting Bed
5. 1/8" Travertine Stone Veneer
6. 1/8" Mortar Joints

INSULATED CONCRETE FORM

1. Insulated Concrete Form
2. Metal Lath
3. Scratch Coat mortar
4. Polymer Setting Bed
5. 1/8" Travertine Stone Veneer
6. 1/8" Mortar Joints

WINDOW JAMB - Sheathing on Wood Studs

1. Exterior Sheathing
2. Metal Weep-Screed
3. Two- Layers WRB
4. Flashing
5. Metal Lath
6. Scartch Coat
7. Polymer Setting bed
8. 1/8" Travertine panels
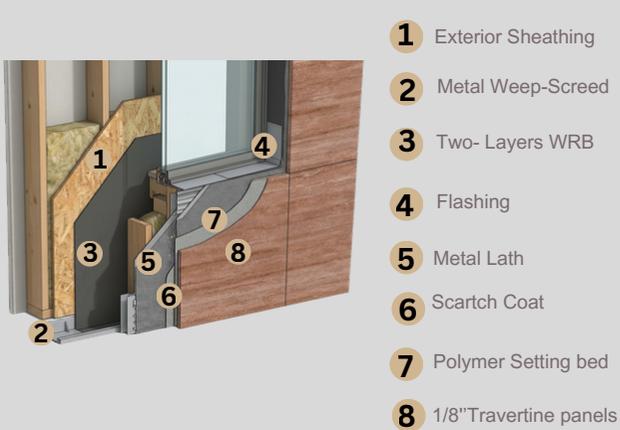
WOOD FRAMING- RIGID INSULATION

1. Wood Sheathing
2. Weep Screed
3. Two-Layers WRB
4. Rigid Insulation
5. Metal Lath
6. Scratch Coat
7. Polymer Setting Bed
8. 1/8" Travertine Panels
9. 1/8" Mortar Joints
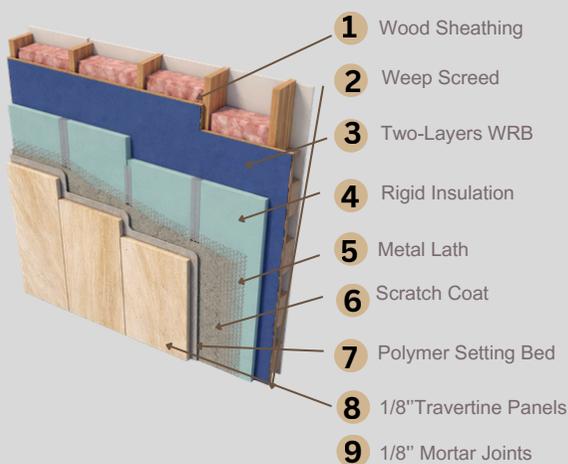
PRODUCT OVERVIEW

INSTALLATION ORIENTATION

VERTICALLY   HORIZONTALLY

WALL-CAP Sheathing on Metal Studs

1. Wood Sheathing
2. Two- Layers WRB
3. Flashing
4. Metal Lath
5. Scratch Coat
6. Polymer Setting Bed
7. 1/8" Travertine panels
8. 1/8" Mortar Joints
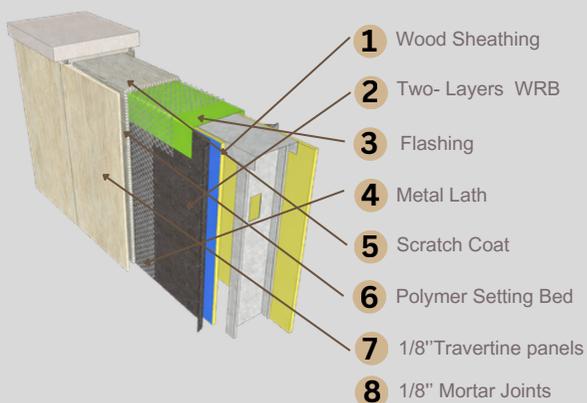
CORNERS DETAILS

Insde Corner
Grount Filler joint

Outside Corner
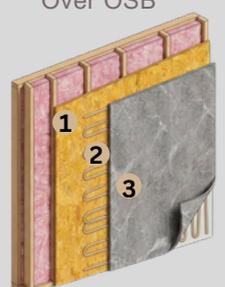Overlap or Grouted butt joint

INTERIOR INSTALLATION SYSTEM

Over Drywall   Over OSB

26 LB Per panel

1. Drywall Substrate
2. Construction adhesive
3. 1/8" Travertine Stone Veneer
4. 1/8" joint color matching grout

1. OSB Substrate
2. Construction adhesive
3. 1/8" Travertine Stone Veneer
4. 1/8" joint color matching grout